




DuraSled™ DS860



2D/1D Imager



Passport Reader

OCR-A
1234ABCD

OCR-B
1234ABCD

MICR E-13B
12341234567890

OCR-A / OCR-B / MICR E13B

For Samsung XCover Pro

The DuraSled™ DS860 is a barcode scanning sled for 1D/2D barcodes and travel identification reading, with Bluetooth® wireless technology for Samsung XCover Pro. The DS860 scans 1D, 2D barcodes, OCR A & B fonts, OCR USC, OCR passport, OCR MICR (E13B) fonts and DotCode while the sled protects devices from tumbles. It is easy-to-use and ideal for the travel industry, retail point of sale, field service or mobile service workers. The sled creates a one-handed solution that will allow merchants to scan barcodes on products and the passports of consumers with one device. Simply insert your XCover Pro, pair your scanner over Bluetooth, open our app and you are ready to go.



Features

- Combines and protects both your Android device and 800 Series scanner with a durable Elastomeric (rubber) case.
- Interchangeable Accessories – All DuraSled accessories are compatible: Charging Adapter, Single Charging Dock, Vehicle Charger, and 6 Bay Charger.
- Long lasting field replaceable battery.
- Simultaneous Charging- Allows the XCover Pro and scanner to be charged at the same time.
- Easy Docking- Magnetic contacts for simple charging connection.
- Bluetooth Setup– Companion app available for easy setup and deployment.
- Designed and made in USA.

DuraSled & Charging Dock Bundle

- (1) DS860 for Xcover Pro
- (1) GDS® Charging Dock
- (1) USB Cable



Download Socket Mobile Companion app for easy pairing, product registration and more!

Optional Accessories

Charging Adapter



Connect your DuraSled to a Snap-Con™ GDS to Micro USB 2.0 Adapter and charge both the scanner and the handheld device at the same time! Perfect for charging at home or anywhere you go.

*Charging Dock



Connect your DuraSled to the GDS® Charging Dock. The exterior docking contacts are specifically engineered for secure docking and charging of both devices in the DuraSled.

*Included with bundle

Vehicle Charging Dock



The Vehicle Charging Dock is a mounted charger for the DuraSled that provides users the freedom to charge their scanner and phone while on the go.

6 Bay Charger



The 6 Bay Charger charges multiple DuraSled devices within a single docking station. This desktop solution is perfect for large offices, conference rooms, vehicle fleets, and other applications requiring mass charging of multiple DuraSleds.

Common Uses

Retail	Hospitality	Point of Sale
Logistics	Life Sciences	Automotive
Healthcare	Travel	

Physical Characteristics

Dimensions	DuraSled for XCover Pro	Weight: 3.84 oz (109.0 g) Size: L 7.25" x H 1.22" x W 3.32" (184.1 x 30.9 x 84.3 mm)
	Charging Dock	Weight: 16.9 oz (478.5g) Size: 7.33"x 1.12" x 3.23" (186.2 x 28.4 x 82.0mm)
	USB 2.0 Cable	1.2 meters (3'9")
LEDs	Scan LED: Green and Red Bluetooth LED: Blue	
Buttons	Scan Button: Scan Power Button: On/Off	

Battery

Type of Battery:	Lithium Ion Polymer- rechargeable field replaceable battery
Charge Time:	8 Hours
Battery Life:	Standby time: 25 hours
Per Full Charge:	Active Scan Time: 34,000 scans within 3 hours (based on 2 scans every 1 second) or 9,000 scans within 10 hours (based on 1 scan every 4 seconds)
Note:	Battery life varies depending on ambient temperature, ambient light, age of battery, etc.
Number of Batteries Used:	1
Weight of battery:	12.5g
Percentage Lithium:	36%
Battery mAh:	700 mAh
Number of cells per battery:	1
Watt Hours per battery:	2.59
Type of Cell (ex. AA):	Proprietary
Chemical Composition (ex. Alkaline):	Lithium - polymer
Lithium Content:	14g
Battery Voltage:	3.7v
Hazmat UN Number:	UN3481, P.I. 967
ROHS Compliance Indicator:	Yes, Included with Scanner
Country of Origin:	China
Commodity Code:	8507.60.0000

Scanner Type

Technology:	2D/1D Barcode Imager & OCR character reader
Light Source Aimer:	Hyper red 660 NM (nanometer) LED 6/0 NM LED

Default Barcode Symbologies:

1D Symbologies: Code 39, Code 128, EAN-13/JAN 13, EAN-8/JAN 8, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, ISBT 128, UPC-A, UPC-E, UPC-E1

2D Symbologies: Aztec, Data Matrix, DotCode, Maxicode, Micro PDF417, Micro QR Code, PDF417, QR Code

Postal Codes: USPS 4CB/One Code/Intelligent Mail

OCR Type Face: OCR B ICAO Travel Documents

Supported Barcode Symbologies:

1D Symbologies: Bookland EAN, Chinese 2 of 5, Codabar, Code 11, Code 39, Code 93, Code 128, Composite CC-A/B, Composite CC-C, Composite TLC-39, Discrete 2 of 5, EAN-13/JAN 13, EAN-8/JAN 8, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, Inverse 1D, ISBT 128, ISSN EAN, Korean 3 of 5, Matrix 2 of 5, MSI, UPC-A, UPC-E/E1

2D Symbologies: Aztec, Data Matrix, GS1 Data Matrix, DotCode, Han Xin, Maxicode, Micro PDF417, PDF417, GS1 QR, Micro QR, QR Code

Postal Codes: Australia Post, Japan Postal, Netherlands KIX Code, UK Postal, UPU FICS Postal, US Planet, US Postnet, USPS 4CB/One Code/Intelligent Mail

OCR Type Face: OCR-A, OCR-B, MICR-BBB, US currency serial number

Watermark Symbology: Digimarc

Scan Angle:

Horizontal: 42° Vertical: 28°


Sensor Resolution:

1280 x 800 pixels

Print Contrast:

Down to 25%

Reading Distance:

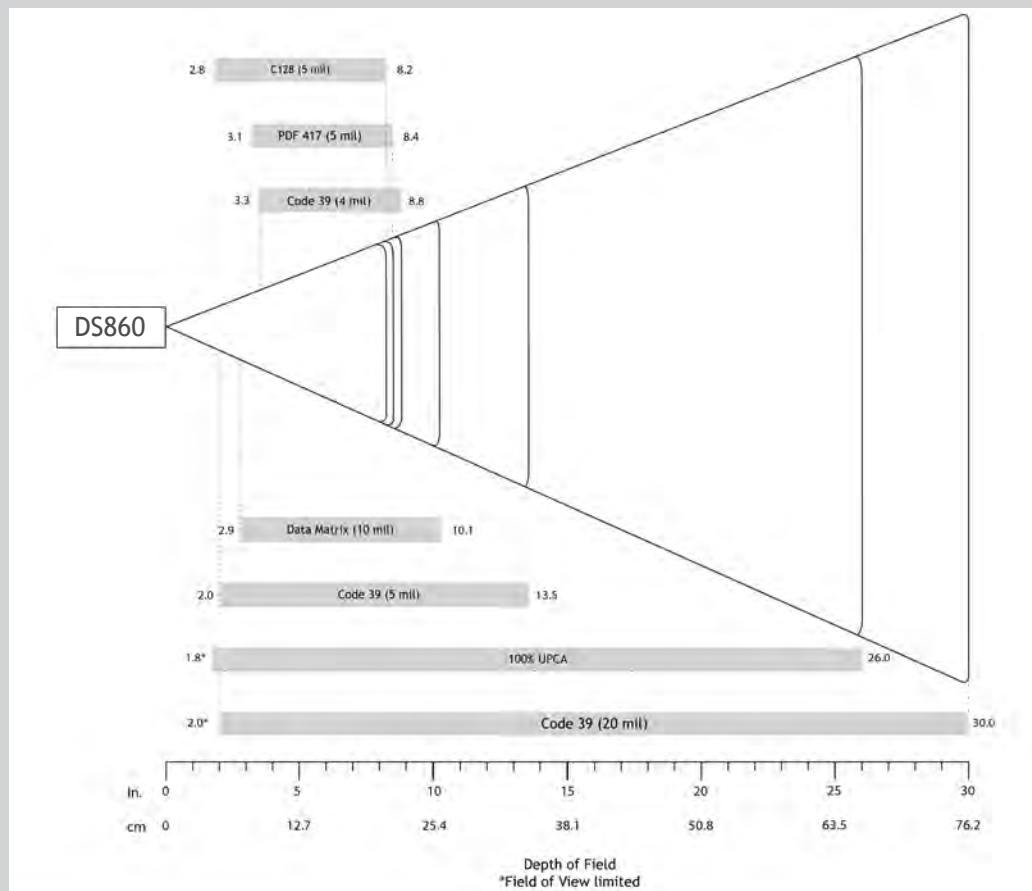

4.6 to 76.2 cm (1.8 to 30.0 in.) Depends on barcode size, symbology, label media, ratio, scan angle

Decode Ranges:

	Near	Far
4 mil Code 39	3.3 in/8.4 cm	8.8 in/22.4 cm
5 mil Code 128	2.8 in/7.1 cm	8.2 in/20.8 cm
5 mil Code 39	2.0 in/5.08 cm	13.5 in/34.3 cm
5 mil PDF	3.1 in/7.9cm	8.4 in/21.3 cm
10 mil Data Matrix	2.9 in/7.4 cm	10.1 in/25.7 cm
100% UPC A	1.8 in/4.6 cm*	26.0 in/66.0 cm
20 mil Code 39	2.0 in/5.08 cm*	30.0 in/76.2 cm

Ambient Light:	From 0 to 100,000 lux From pitch black to direct sun light
Operating Temperature:	+32 to +122°F (0 to +50°C)
Storage Temperature:	-22 to +158°F (-30 to +70°C)
Relative Humidity:	5% to 95% (non condensing)
Sealing:	IP40
Drop Specifications:	Multiple drops to vinyl covered concrete at 3 feet or 1 meter

Operating System Compatibility



Android OS: Basic Mode (HID)* & App Mode (SPP)

Compatible with devices supporting Basic Mode (HID)* protocol

Supported keyboard languages - ANSI, English UK, English, French, German, Italian, Japanese, Polish, Spanish and Swedish

**By default, the factory settings of the Socket Mobile Scanners are set to Basic Mode (keyboard emulation: HID). In order to use the scanner with an application using Capture SDK, the scanner must be configured in App Mode (Bluetooth Serial Port Profile: SPP).*

Bluetooth (wireless connection)

Bluetooth Radio:	Class 2 Bluetooth, version 2.1 + EDR (Enhanced Data Rates) with 56-bit data encryption
Bluetooth Range:	Up to 10 m (33 ft.) depending on environment, range limit is usually due to the Host Device (phone, tablet or notebook)
Bluetooth Profiles:	Basic Mode - Human Interface Device (HID)* and App Mode - Serial Port Profile (SPP) <i>*By default, the scanner is set to Basic Mode (HID).</i>

Apple, Android and Windows PC with Bluetooth Classic HID are compatible with all Socket Mobile scanners.

*Chromebook and Linux supports HID mode only.

Certification & Regulatory

Electrical Safety:	Certified to IEC 60950-1, UL 60950-1, CAN/CSA C22.2
Environmental:	RoHS compliant
EMI / RFI:	FCC Part 15 Class C, RSS 210, iCES 003, C-Tick, CISPR 22, CE EN55022, EN55024, TELEC
LED Safety:	IEC 60825-1, EN 60825-1 FCC: T9J-RN42 IC: 6514A -RN42 Telec ID: 201-125709



Warranty

Scanner:	Standard one year limited warranty
Accessories:	Standard one year limited warranty
Extended Warranty: (sold separately)	www.socketmobile.com/socketcare



socketmobile.com	sales@socketmobile.com	sales-japan@socketmobile.com
Worldwide:	Asia Pacific:	Japan:
+1 510 933 3000	+1 510 933 3122	+8190 9808 0518
North America:	Germany:	Japan (Toll Free):
+1 800 552 3300	+41 62 834 07 80	+81 (800) 9190303
EMEA & Russia:	Switzerland:	Latin America:
+41 62 834 07 80	+41 62 834 07 80	+1-510-933-3153
France:	Switzerland (Toll Free):	Taiwan (Toll Free):
+33 (801) 840504	+41 (800) 898003	+886 00801491497
Malaysia (Toll Free):	UK/Ireland/South Africa:	
+60 (1800) 818234	+44 (800) 0487363	